


Name **KANTO TRIMLESS**  
Number **KT105S**

**kinetura**  
*By Tekna*


## General

Location	Indoor
Main Material	Steel/ Aluminum
IP Class	IP20
Class	I
Bathroom zone	Not applicable
Voltage	220-240 VAC/ 50-60 Hz
Power supply	Integrated 24V DC/20W
Cable length ( m )	-
Dimensions ( mm/ W-H-D )	990-990-72 Ø 600
Mounting method	Mounting frame (plasterboard/concrete)
Gross weight (kg)	19kg
Gross weight ( kg)	16kg
Packaging (mm / W-H-D)	1050-1070-160mm

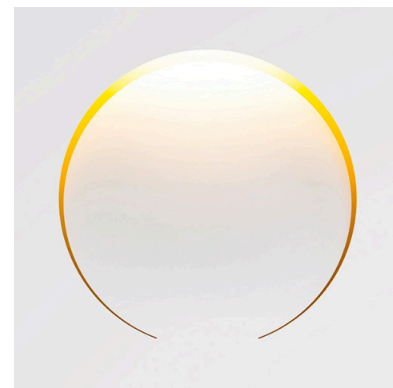

## Lamp



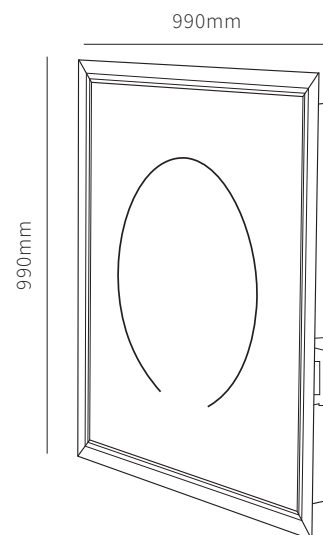



Light source	LED Module
Number of light sources	4
Power consumption	24W
Luminous flux	2640lm (source)
Color temperature	2700K
CRI	80
Lifetime	50.000hrs
0% to 100%	30Sec



## Electrical

Switch	Yes (Bluetooth + Dali)
Battery	No
Dimmable	Yes
Dimming range	<20% to 100%
Dimming method	Bluetooth (Casambi)
Supply Frequency	-
Driver/Ballast Voltage	-
Rated Power	30W

## Finishes


Interior finish	 Custom Color
	 Lacquered Jet Black
	 Lacquered Ghost White
	 Lacquered Venetian Red
	 Anodized Olympic Gold
Exterior finish	 White Primer

Name **KANTO TRIM**  
Number **KT105T**

**kinetura**  
*By Tekna*


## General

Location	Indoor
Main Material	Steel/ Aluminum
IP Class	IP20
Class	I
Bathroom zone	Not applicable
Voltage	220-240 VAC/ 50-60 Hz
Power supply	Integrated 24V DC/20W
Cable length ( m )	-
Dimensions ( mm/ W-H-D )	920-920-72 Ø 600
Mounting method	Snap-system (fibreboard)
Gross weight (kg)	19kg
Gross weight ( kg)	16kg
Packaging (mm / W-H-D)	1050-1070-160mm

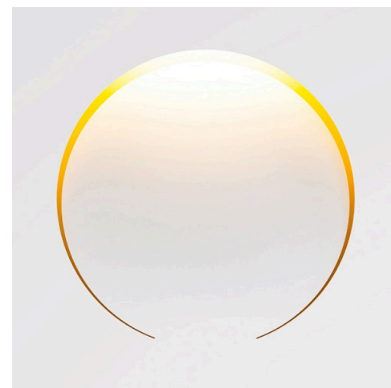

## Lamp



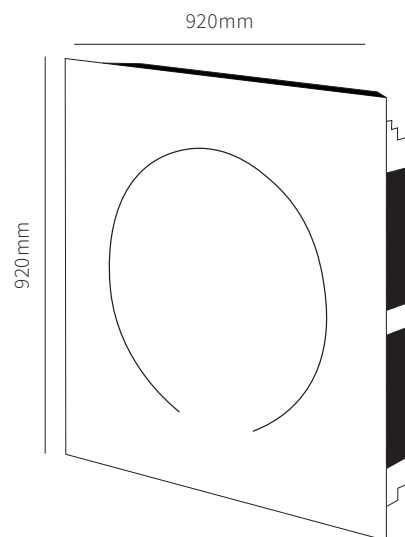




Light source	LED Module
Number of light sources	4
Power consumption	24W
Luminous flux	2640lm (source)
Color temperature	2700K
CRI	80
Lifetime	50.000hrs
0% to 100%	30Sec



## Electrical

Switch	Yes (Bluetooth + Dali)
Battery	No
Dimmable	Yes
Dimming range	<20% to 100%
Dimming method	Bluetooth (Casambi)
Supply Frequency	-
Driver/Ballast Voltage	-
Rated Power	30W

## Finishes


Interior finish	 Custom Color
	 Lacquered Jet Black
	 Lacquered Ghost White
	 Lacquered Venetian Red
	 Anodized Olympic Gold
Exterior finish	 White Primer
	 Lacquered Ghost White

Name **KANTO ON BOX**  
 Number **KT105B**

**kinetura**  
*By Tekna*


## General

Location	Indoor
Main Material	Steel/ Aluminum
IP Class	IP20
Class	I
Bathroom zone	Not applicable
Voltage	220-240 VAC/ 50-60 Hz
Power supply	Integrated 24V DC/20W
Cable length ( m )	1,6m
Dimensions ( mm/ W-H-D )	929-929-75 Ø 600
Mounting method	Stand-alone
Gross weight (kg)	23,5kg
Gross weight ( kg)	20,5kg
Packaging (mm / W-H-D)	1050-1070-160mm

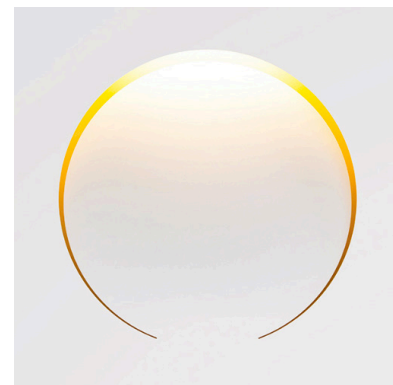

## Lamp

Light source	LED Module
Number of light sources	4
Power consumption	24W
Luminous flux	2640lm (source)
Color temperature	2700K
CRI	80
Lifetime	50.000hrs
0% to 100%	30Sec

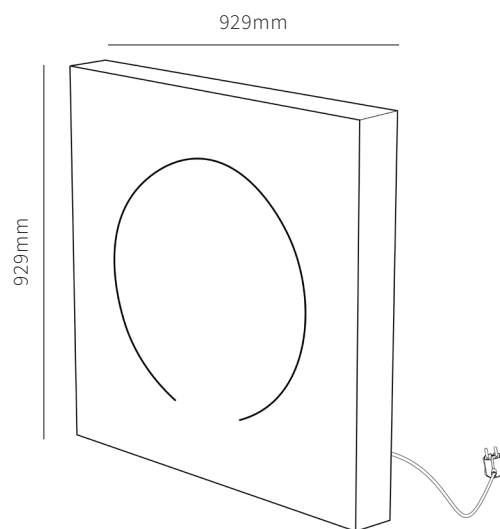

## Electrical

Switch	Yes (Bluetooth + pushbutton)
Battery	No
Dimmable	Yes
Dimming range	<20% to 100%
Dimming method	Bluetooth (Casambi)
Supply Frequency	-
Driver/Ballast Voltage	-
Rated Power	30W

## Finishes

Interior finish		Lacquered Jet Black
		Lacquered Ghost White
		Lacquered Venetian Red
		Anodized Olympic Gold
Exterior finish		Lacquered Ghost White
		Aged Bronze
		Aged Brass
		Acid Green
		Lacquered Jet Black
		Lacquered Ghost White