


Name **Santiago**
Number KT102S

kinetura
By Tekna


General

Location	Indoor
Main Material	Steel/Aluminium
IP Class	IP20
Class	I
Bathroom zone	Not applicable
Voltage	220-240 VAC/ 50-60 Hz
Power supply	Integrated 24V DC/20W
Cable length (m)	-
Dimensions (mm/ W-H-D)	280-600-72
Mounting method	Mounting frame (plasterboard/concrete)
Gross weight (kg)	4,5
Net weight (kg)	3,5
Packaging (mm / W-H-D)Location	340-700-95

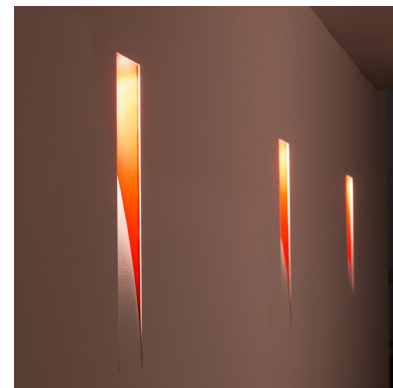

Lamp



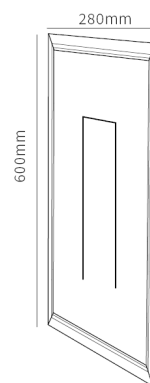



Light source	LED module
Number of light sources	1
Power consumption	12W
Luminous flux	1190 lm (source)
Color temperature	2700K
CRI	90
Lifetime	50.000hrs
0% to 100%	30Sec



Electrical

Switch	Yes (Bluetooth + Dali)
Battery	No
Dimmable	Yes
Dimming range	<20% to 100%
Dimming method	Bluetooth (Casambi)
Supply Frequency	-
Driver/Ballast Voltage	-
Rated Power	20W

Finishes

Interior finish	 Ghost White
	 Venetian Red
	 Jet Black
	 Sunrise Yellow
	 Custom Color
Exterior finish	 Primed White